


Afinia

aluminium radiators by Grant

Superb conductors of heat, stylish with their curved design, and available in horizontal and vertical options, Afinia aluminium radiators combine functionality and aesthetics to deliver the ideal partner for both traditional and renewable heating systems.



Horizontal & vertical options

6 to 15 section variants

Highly responsive


Ideal for low temperature systems such as ASHP's

Sleek slimline design

Light to handle & simple to install



*parts only guarantee

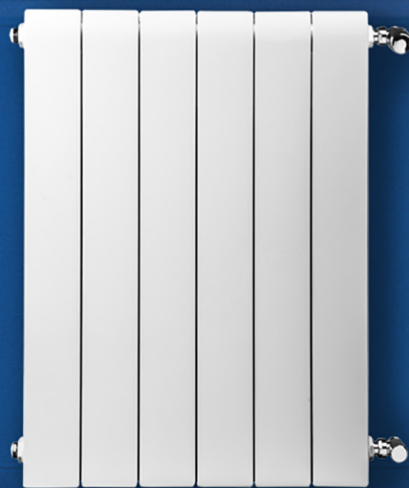

www.grantuk.com



Technical Specifications



STANDARD

Code	Panels	Output W ΔT30	Output W ΔT50	Height (mm)	Width (mm)	Width Per section (mm)	Depth (mm)	Panel Output W ΔT30	Panel Output W ΔT50	Weight Empty (kg)	Weight Full (kg)
GALU4306KIT	6	288	552	430	480	80	95	48	92	6.06	7.56
GALU4308KIT	8	384	736	430	640	80	95	48	92	8.08	10.08
GALU43010KIT	10	480	920	430	800	80	95	48	92	10.10	12.60
GALU43012KIT	12	576	1104	430	960	80	95	48	92	12.12	15.12
GALU43014KIT	14	672	1288	430	1120	80	95	48	92	14.14	17.64
GALU5806KIT	6	366	744	580	480	80	95	61	124	8.10	10.14
GALU5808KIT	8	488	992	580	640	80	95	61	124	10.80	13.52
GALU58010KIT	10	610	1240	580	800	80	95	61	124	13.50	16.90
GALU58012KIT	12	732	1488	580	960	80	95	61	124	16.20	20.28
GALU58014KIT	14	854	1736	580	1120	80	95	61	124	18.90	23.66
GALU58015KIT	15	915	1860	580	1200	80	95	61	124	20.25	25.35
GALU6806KIT	6	432	852	680	480	80	95	72	142	9.60	11.94
GALU6808KIT	8	576	1136	680	640	80	95	72	142	12.80	15.92
GALU68010KIT	10	720	1420	680	800	80	95	72	142	16.00	19.90
GALU68012KIT	12	864	1704	680	960	80	95	72	142	19.20	23.88
GALU68014KIT	14	1008	1988	680	1120	80	95	72	142	22.40	27.86
GALU68015KIT	15	1080	2130	680	1200	80	95	72	142	24.00	29.85



VERTICAL

Code	Panels	Output W ΔT30	Output W ΔT50	Height (mm)	Width (mm)	Width Per section (mm)	Depth (mm)	Panel Output W ΔT30	Panel Output W ΔT50	Weight Empty (kg)	Weight Full (kg)
GALUV18426KIT	6	816	1626	1842	480	80	80	136	271	15.48	19.56
GALUV18428KIT	8	1088	2168	1842	640	80	80	136	271	20.64	26.08
GALUV20426KIT	6	882	1758	2042	480	80	80	147	293	16.86	21.36
GALUV20428KIT	8	1176	2344	2042	640	80	80	147	293	22.48	28.48