


- Outputs available: 6,10,13 & 17 kW
- Supplied with HPIDR32PACKR


IMPORTANT

The below diagram shows the Flow (outlet) and Return (inlet) connection positions for HPID6R32BODY models ONLY.

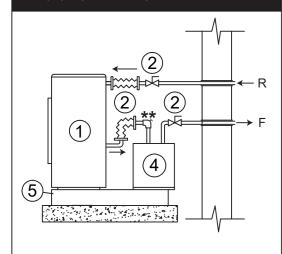

**Compression elbow c/w air vent (supplied with HPIDVOL30EXT6)



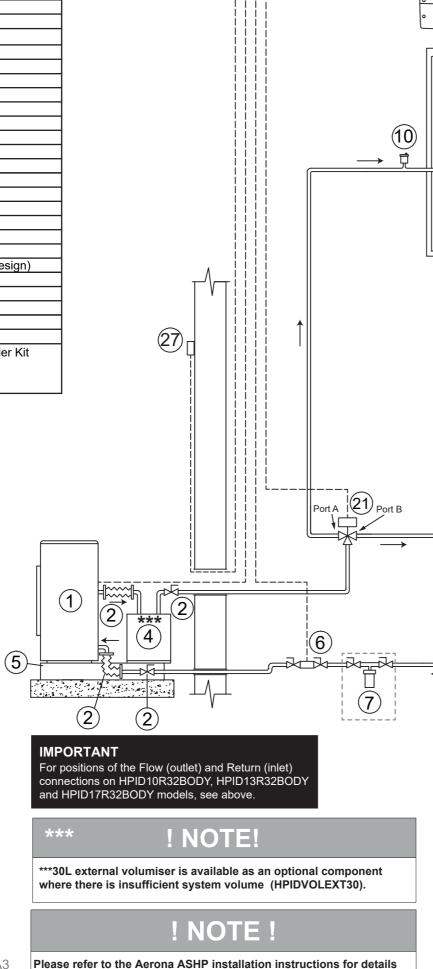

of the flow and return connections at the heat pump.

8

(12)

(13)

! NOTE

15) 16)

Grant Sealed System Kit

19

For additional heater support from Grant External Volumiser, Refer to Grant Aerona Smart Controller installation manual and Schematics HPCS-BUHS and HPCS-BUHE.

(17)

(14)

! NOTE!

This system schematic should be read in conjunction with the Grant Aerona Smart Control installation instructions and wiring diagram HPCS-R002ER32.

Project Title: Grant Aerona Smart Controls Installation Pack R

(3)r

Close couple tees to be as possible and no more than 4 pipe diameters. (3)

W-Plan Plus type system

UFH (UH8 Controls) downstairs - Radiators upstairs HW priority & Legionella protection provided by

Revision Details:

If the optional room thermostats are

ensure satisfactory performance of the system. Refer to the Smart

Controller manual for details

0.4 21/06/24 Approved

Smart Controller (system schematic)

Drawing Set: Aerona Smart Control Dwg. No: HPCS-R002SR32 System Schematics

Revision: 0.4 Status: Approved

Rev Date: 21/06/24 | Drawn By: AC&DB | Checked By: NS