


QR2 Single Coil Cylinders



Dimensions (mm)	150L	180L	210L	250L	300L
A	263	262	262	262	262
B	512	507	507	507	507
C	884	882	882	882	882
D	-	-	-	1200	1512
E	884	1013	1200	1450	1762
F	1175	1354	1541	1791	2103

Model	Actual Capacity (ltrs)	ErP Rating	Coil rating primary (kW)	Standing heat loss (kW/24hrs)	Overall Height (mm)	Overall Diameter (mm)	Weight empty (kg)	Weight full (kg)
QR2SC150	138	B	44.70	1.15	1175	561	36.5	174.5
QR2SC180	168	B	42.14	1.21	1354	561	39	207
QR2SC210	199	B	39.58	1.41	1541	561	44	242
QR2SC250	238	B	36.17	1.54	1791	561	49	287
QR2SC300	288	C	31.90	1.81	2103	561	54.5	342



QR2 Single Coil Slimline Cylinders

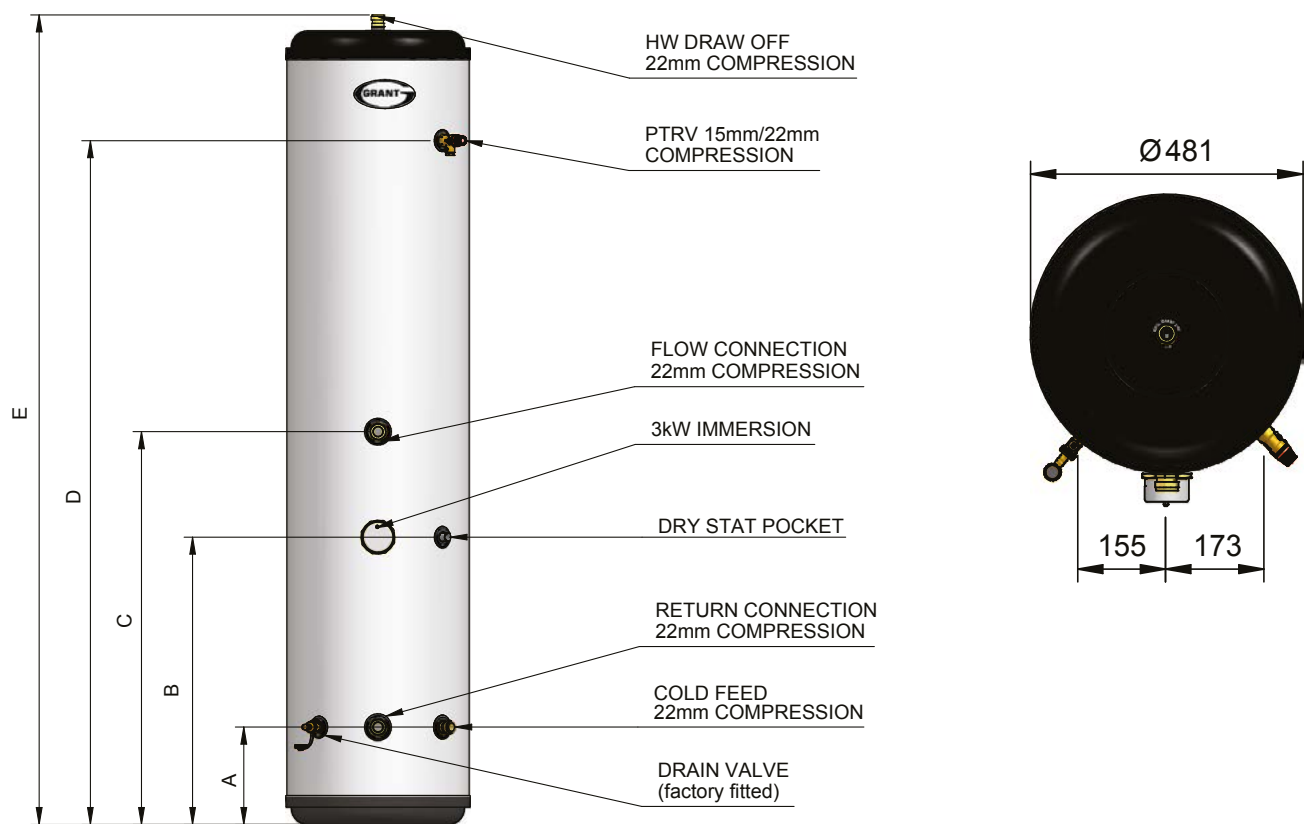

Dimensions (mm)	150L	180L	210L
A	254	254	254
B	749	749	749
C	1024	1024	1024
D	1240	1511	1783
E	1567	1839	2110

Model	Actual Capacity (ltrs)	ErP Rating	Coil rating primary (kW)	Standing heat loss (kW/24hrs)	Overall Height (mm)	Overall Diameter (mm)	Weight empty (kg)	Weight full (kg)
QR2SC150SL	140	B	37.50	1.24	1567	481	37	179
QR2SC180SL	170	B	36.55	1.40	1839	481	44	214
QR2SC210SL	200	C	35.60	1.57	2110	481	49	248.5

QR2 Single Coil Pre-Plumbed Cylinders

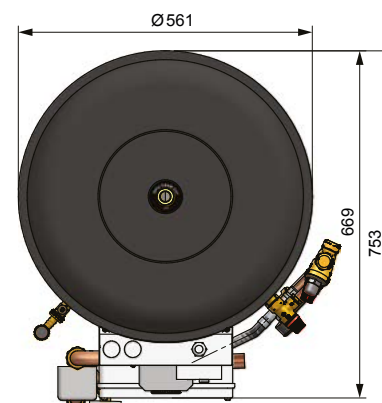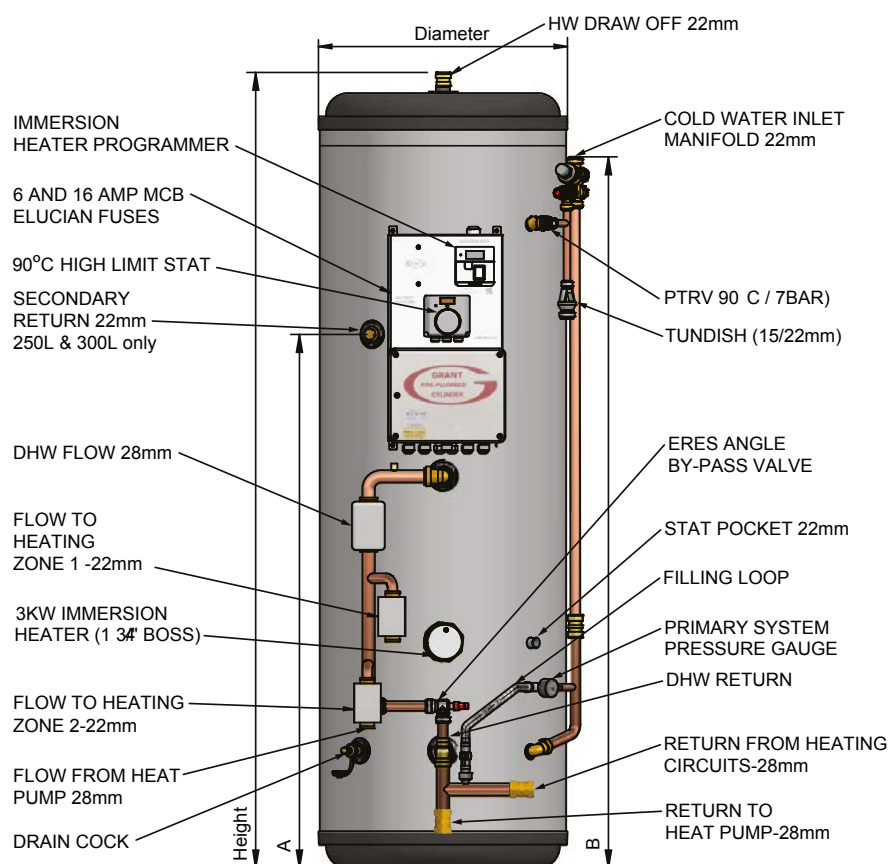

Dimensions (mm)	180L	210L	250L	300L
A*	-	-	1200	1511
B	1159	1354	1601	1940
Height	1354	1541	1792	2103

*Secondary return on 250 & 300 litre models ONLY

Model	Actual Capacity (ltrs)	ErP Rating	Coil rating primary (kW)	Standing heat loss (kW/24hrs)	Overall Height (mm)	Overall Diameter (mm)	Weight empty (kg)	Weight full (kg)
QR2SMART180PP	168	B	42.14	1.21	1354	561	46	214
QR2SMART210PP	198	B	39.58	1.41	1541	561	51	249
QR2SMART250PP	238	B	36.17	1.54	1792	561	56	294
QR2SMART300PP	288	C	31.90	1.81	2103	561	61.5	349